

# WOODS

## BATWING<sup>®</sup> CUTTERS



We not only build the toughest Batwing<sup>®</sup>,  
we build the only Batwing<sup>®</sup>

### Table of Contents

- 15-foot Standard-duty Series** ..... 4  
 BW180X  
 BW126X (10.5 ft. Single-wing Cutter)
- 15-foot Heavy-duty Series** ..... 4  
 BW180XHD  
 BW126XHD (10.5 ft. Single-wing Cutter)
- 10.5-foot Extreme-duty** ..... 5  
 BW1260X
- 15-foot Extreme-duty** ..... 6  
 BW1800X
- 15-foot Low Horsepower-duty** ..... 7  
 BW15LH
- 20-foot Standard-duty** ..... 8  
 BW240
- 20-foot Heavy-duty** ..... 9  
 BW240HD
- 20-foot Extreme-duty Series** ..... 9  
 BW2400X  
 BW1620X (13.5 ft. Single-wing Cutter)
- Specifications Chart** ..... 10

**Woods** care  
 GENUINE PARTS

Maintain the quality and performance of your Woods equipment with WoodsCare genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.



### Legend

Woods products are top-quality machines, tested to industry standards, proven in the field, and consistently constructed to American Welding Society specifications.

**Standard-duty**  
 Designed and manufactured for typical usage and basic applications.

**Medium-duty**  
 Designed and manufactured for harsher usage and more robust applications.

**Heavy-duty**  
 Designed and manufactured for extended usage and the most demanding applications.

**Extreme-duty**  
 Designed and manufactured for severe usage and the most intense applications.

**Low-horsepower**  
 Designed and manufactured for use on tractors as low as 40 horsepower.



Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

**Find a Woods Dealer**  
 Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.

## Proven Durability

We not only build the toughest Batwing®, we build the only Batwing®! But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose Batwing® for the sheer ability to tame the most unruly waterways, pastures, and roadsides.

## Unbeatable Performance

Higher torque capacities, deeper decks, and our innovative wing design ensure you'll mow more material in less time. Woods Batwing® cutters set the standards for cut quality, distribution, and ease of use, whether you're cutting brush or shredding stalks.




### Optional Shredding Kit

An optional shredding kit allows you to shred crop residue. Available on BW180XHD, 1800X, 240HD, 2400X

## Batwing® Cutters

### Large Gearboxes

Large gearboxes with a 6-year limited warranty

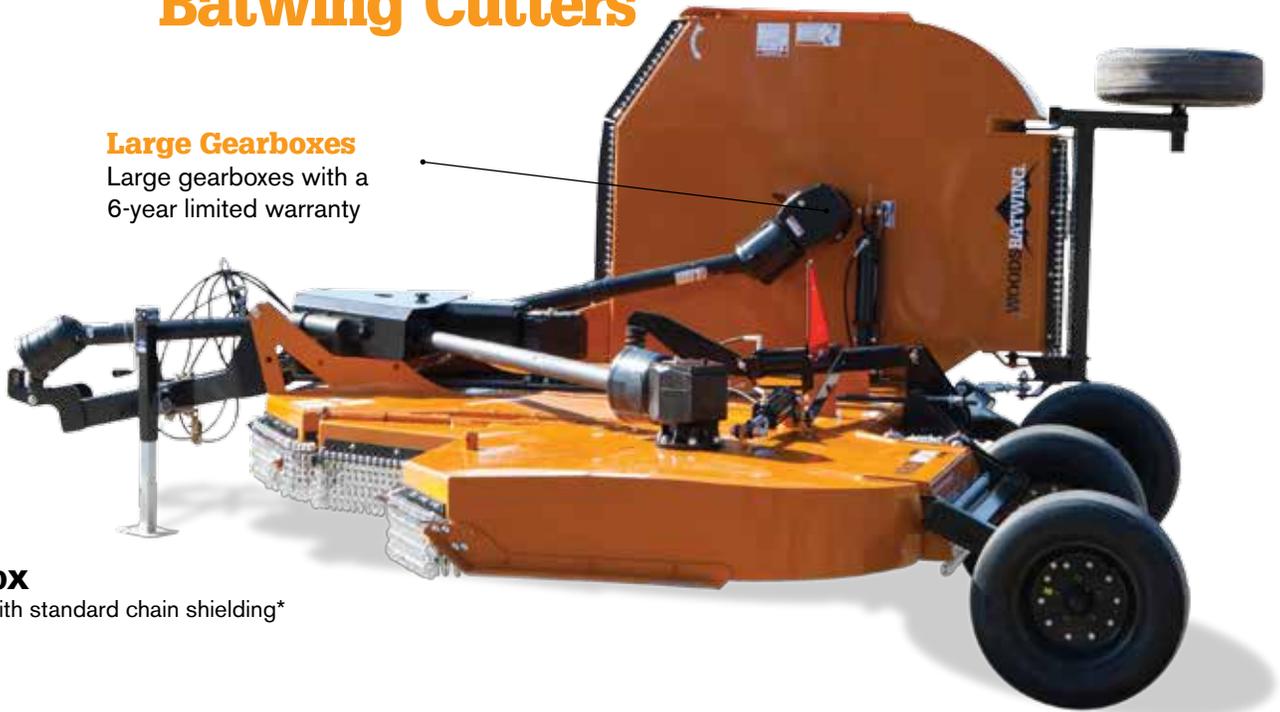

### BW180X

shown with standard chain shielding\*

## 15-Foot Standard-duty Series

Tractor ranges: 45–160 hp

### Models

**BW180X** 15 ft. Dual-wing Cutter  
**BW126X** 10.5 ft. Single-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Cuts brush up to 2.5-inches in diameter
- Wings fold up independently to a narrow 96" transport width and lock securely for quick and easy transport
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Dual-wheels available on wings and center for extra flotation
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution

## 15-Foot Heavy-duty Series

Tractor ranges: 55–235 hp

### Models

**BW180XHD** 15 ft. Dual-wing Cutter  
**BW126XHD** 10.5 ft. Single-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Swivel clevis hitch
- Cuts brush up to 3.5-inches in diameter
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Optional shredding kit available for shredding crop residue
- Dual-wheels available on wings and center for extra flotation
- Full-length, 1-inch wing hinge pin
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution

# 10.5-Foot Extreme-duty Series

Tractor ranges: 65–250 hp

## Model

**BW1260X** 10.5 ft. Single-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Cat 5 wing drives
- Massive, heavy-duty gearboxes have blade tip speeds of 16,000 fpm, delivering more cutting power and performance
- Optional blade ring
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution

### Bolt-on Skid Shoes

Bolt-on skid shoes with an approachable leading edge are replaceable and reduce sod damage when turning

### Wing Dual Wheels

Optional dual wheel spring axles are rugged and durable

### BW1260X

shown with standard chain shielding\*

### Self-Leveling Hitch

Self-leveling, swivel clevis hitch is standard equipment, reducing stresses to the BW1260X and your tractor when operating on uneven terrain



**\*NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

## Batwing® Cutters

### 15-Foot Extreme-duty Series

Tractor ranges: 65–250 hp

#### Models

**BW1800X** 15 ft. Dual-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Optional shredding kit available for shredding crop residue
- Massive, heavy-duty gearboxes have blade tip speeds of 16,000 fpm, delivering more cutting power and performance
- Optional blade ring
- Heavy-duty skid shoes with an “approachable” leading edge reduce sod damage when turning
- Exclusive quick-change pins enable speedy blade changes in the field

#### Self-Leveling Hitch

Self-leveling, swivel clevis hitch is standard equipment, reducing stresses to the BW1800X and your tractor when operating on uneven terrain

#### Walking Tandem Axle

Optional walking tandem dual wheel spring axles are rugged and durable



**BW1800X**  
shown with  
standard chain  
shielding\*

#### Bolt-on Skid Shoes

Bolt-on skid shoes with an approachable leading edge are replaceable and reduce sod damage when turning

**Wheel Options**

Laminated solid tires, used aircraft tires or foam-filled aircraft tires

**Gearbox Warranty**

Gearboxes carry a six-year limited warranty

**BW15LH** shown with standard chain shielding\*

## 15-Foot Low Horsepower-duty

Our innovative lightweight design makes it possible to use a smaller, more fuel-efficient tractor, saving money every time you mow. With tongue weight under 900 lbs, the BW15LH is ideal for use on compact and utility tractors.

Tractor range: 40–90 hp

**Model**

**BW15LH** Low Horsepower 15 ft. Dual-wing Cutter


- Main driveline: Cat 4 CV
- Full-length, 24-inch replaceable side skids feature a large wear surface for greater durability and a formed angle to prevent scalping
- Safety lock easily secures deck for safe, simple transporting
- Deep, 10-inch side frame and sloped deck has greater material capacity for efficient productive cutting
- Wheel options – laminated solid tires, used aircraft tires or foam-filled aircraft tires
- Dual-wheels available on wings and center for extra flotation

**\*NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

# WOODS

## Batwing® Cutters

20-Foot Batwing® Cutters

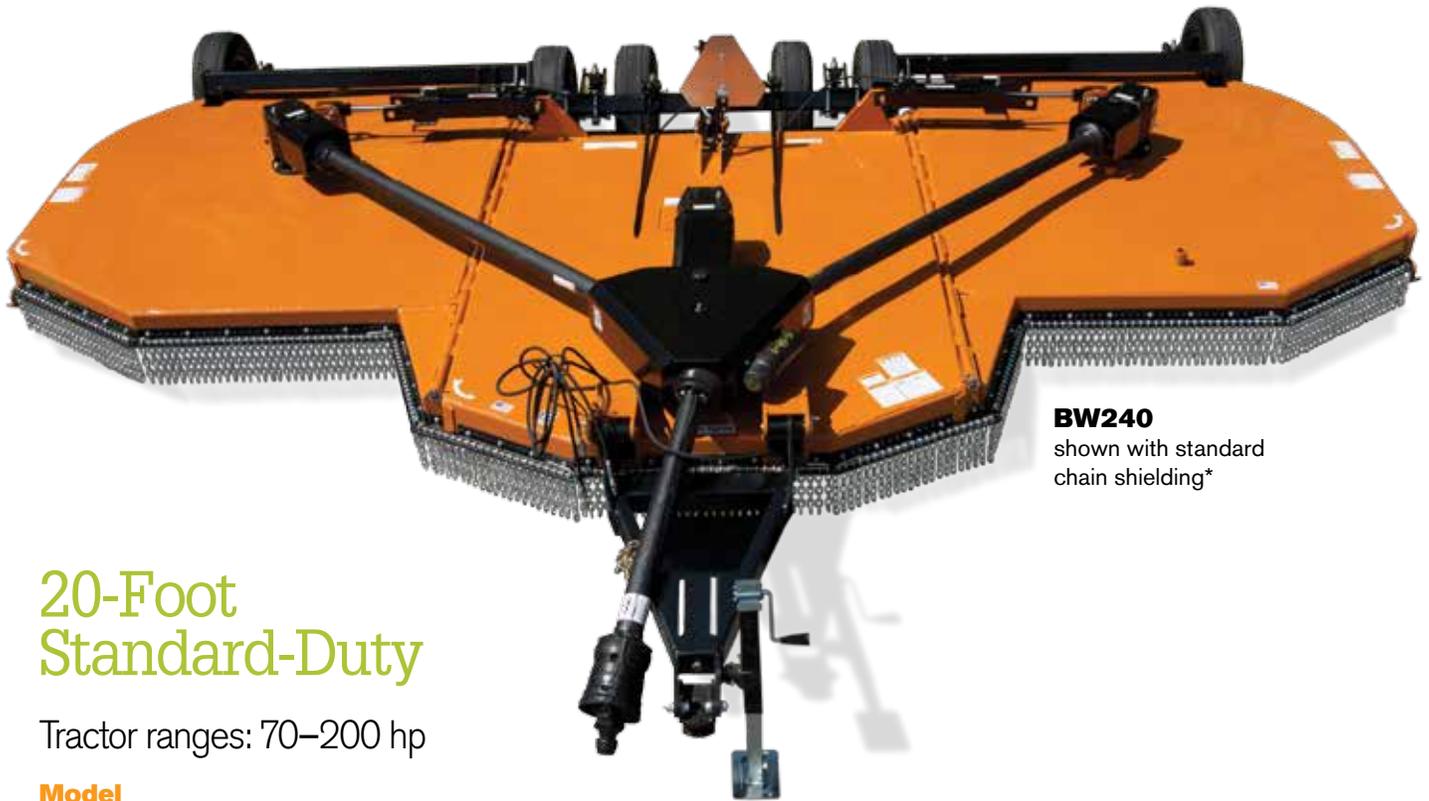

**BW240**  
shown with standard  
chain shielding\*

### 20-Foot Standard-Duty

Tractor ranges: 70–200 hp

**Model**

**BW240** 20-foot folding-wing rotary cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Cuts brush up to 2-inches in diameter
- Side frame depth of 13.25-inches – the deepest in the industry
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Walking tandem axle available
- Fully baffled deck for even distribution



## 20-Foot Heavy-duty

Tractor ranges: 70–300 hp

### Model

**BW240HD** 20-foot folding-wing rotary cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Cuts brush up to 3-inches in diameter
- Side frame depth of 13.25-inches – the deepest in the industry
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution
- Self-leveling, swivel clevis hitch

## 20-Foot Extreme-duty Series

Tractor ranges: 70–300 hp

### Models

**BW2400X** 20-foot folding-wing rotary cutter

**BW1620X** 13.5-foot single folding-wing rotary cutter

- Self-leveling, swivel clevis hitch
- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint and Cat 5 wing drive
- Cuts brush up to 4-inches in diameter
- Extra-heavy double-deck
- Side frame depth of 12.5-inches
- Choice of right or left wing on the BW1620X
- Optional dual tires available for wings
- Six-year gearbox limited warranty
- Fully baffled deck for even distribution



**BW240HD**  
shown with standard  
chain shielding\*

**\*NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

## Batwing® Cutters

Specifications	BW180X / BW126X	BW180XHD / BW126XHD	BW1800X / BW1260X
Tractor PTO HP Range	45–160 hp	55–235 hp	65–250 hp
Side Frame Depth	13"		
Cutting Swath	180" / 126"		
Cutting Height	2"–15"		
Cutting Capacity Diameter	2.5"	3.5"	4"
Hitch	clevis	swivel clevis; optional pintel ring	self-leveling swivel clevis; optional pintel ring
Transport Width	96" / 93"		
Overall Width	190" / 136"		
Overall Length	205" / 205"		
Deck Type	smooth, sloped		
Deck Thickness	.135"	.179"	
Side Frame Thickness	.25"		
Hinge Rod Diameter	1" full length		
Weight	4,100 / 3,950 lbs	4,730 / 4,370 lbs	5,300 / 5,100 lbs
Tongue Weight	1,310 / 1,380 lbs	1,660 / 1,530 lbs	1,790 / 1,860 lbs
Main Driveline Rating	Cat 6 CV or Cat 5 heavy 3 joint		
Output Shaft Diameter	2"	2.38"	
Splitter/Spindle Gearbox HP	160 / 120 hp	235 / 205 hp	235 / 205 hp
Blade Type	.5" x 4" quick change blade pins, hi-lift, flat or shredder		
Blade Overlap	6"		
Blade Tip Speed 540 RPM	15,000 fpm	16,000 fpm	16,000 fpm
Blade Tip Speed 1,000 RPM	16,000 fpm	16,000 fpm	16,000 fpm
Material Flow System	fully baffled deck		
Stump Jumper Type	standard round-welded		
Wing Flex Up/Down	90° up, 22° down		
Suspension	spring on cylinder	spring on cylinder / walking tandem spring arms	rigid spring arms or walking tandem spring arms
Wheel Type	15" rims, 21" laminated, 24" or 29" used aircraft tires or foam-filled aircraft tires		
Wing Leveling Adjustment	easy adjust turnbuckle		
Shielding	rubber belting, single or double chain		single or double chain
Gearbox Warranty (limited)	6 year		
Deck Rust-Through Warranty	10 year		
	Standard-duty	Heavy-duty	Extreme-duty

BW15LH	BW240	BW240HD	BW2400X	BW1620X
40–90 hp	70–200 hp	70–300 hp	70–300 hp	
10"	13.25"		12.5"	
180"	240"			162"
2"–12"	2"–15"			
1.5"	2" / 3"		4"	
clevis	self-leveling clevis; optional pintel ring	standard self-leveling swivel clevis; optional pintel ring		
96"	123"			100"
190"	250"			171"
170"	198"			
smooth, sloped	smooth, sloped		smooth, sloped double-deck	
.120"	.135"		.135" / .135" upper/lower	
.18"	.25"			
1" full length				
3,120 lbs	6,510 lbs	6,600 lbs	7,740 lbs	8,500 lbs
872 lbs	2,400 lbs		2,700 lbs	2,870 lbs
Cat 4 CV	Cat 6 CV or Cat 5 heavy 3 joint			
2"	2"	2.38"	2.38"	
160 / 90 hp	235 (120) hp	235 (190) hp	250 / 210 hp	
.5" x 4" blade bolt, hi-lift	.5" x 4" quick change blade pins, hi-lift, flat or shredder			.5" x 4" quick change blade pins, hi-lift, flat
6"				
15,270 fpm	15,450 fpm		15,450 fpm	
–	16,300 fpm		16,650 fpm	
partially baffled deck	standard baffles			
standard bolt-on	standard round-welded			
90° up, 22° down				left or right wing – 90° up, 22° down
spring on cylinder	standard spring suspension or optional tandem spring arms			
15" rims, 21" laminated, used aircraft tires or 24" foam-filled aircraft tires	15" rims, 21" laminated, 24" or 29" used aircraft tires or foam-filled aircraft tires			
easy adjust turnbuckle				
rubber belting or chain	rubber belting or single or double chain			
6 year	6 year			
–	10 year			
Low Horsepower-duty	Standard-duty	Heavy-duty	Extreme-duty	

**Woods Equipment** A Blount International Company  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2014 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

